

# MUNCHER

HIGH OUTPUT SINGLE-UNIT RECYCLING SYSTEMS FROM MUNCHY



OUTPUTS FROM 220 - 1100 lb/hr



FILM



BAGS, SACKS  
&  
PUNCH-OUTS



PURGINGS  
&  
START-UP SCRAP



FABRICS  
&  
NON WOVENS



FIBRES, TAPES  
&  
ROPES



MATERIAL  
HANDLING  
OPTIONS



POWERFUL  
INTEGRATED  
SHREDDER



EASY  
CLEAN  
PELLETISING




QUICK & EASY  
OPERATOR  
MAINTENANCE



1ST GRADE  
QUALITY  
PELLETS



# TYPICAL RECYCLING CENTRE LAYOUT

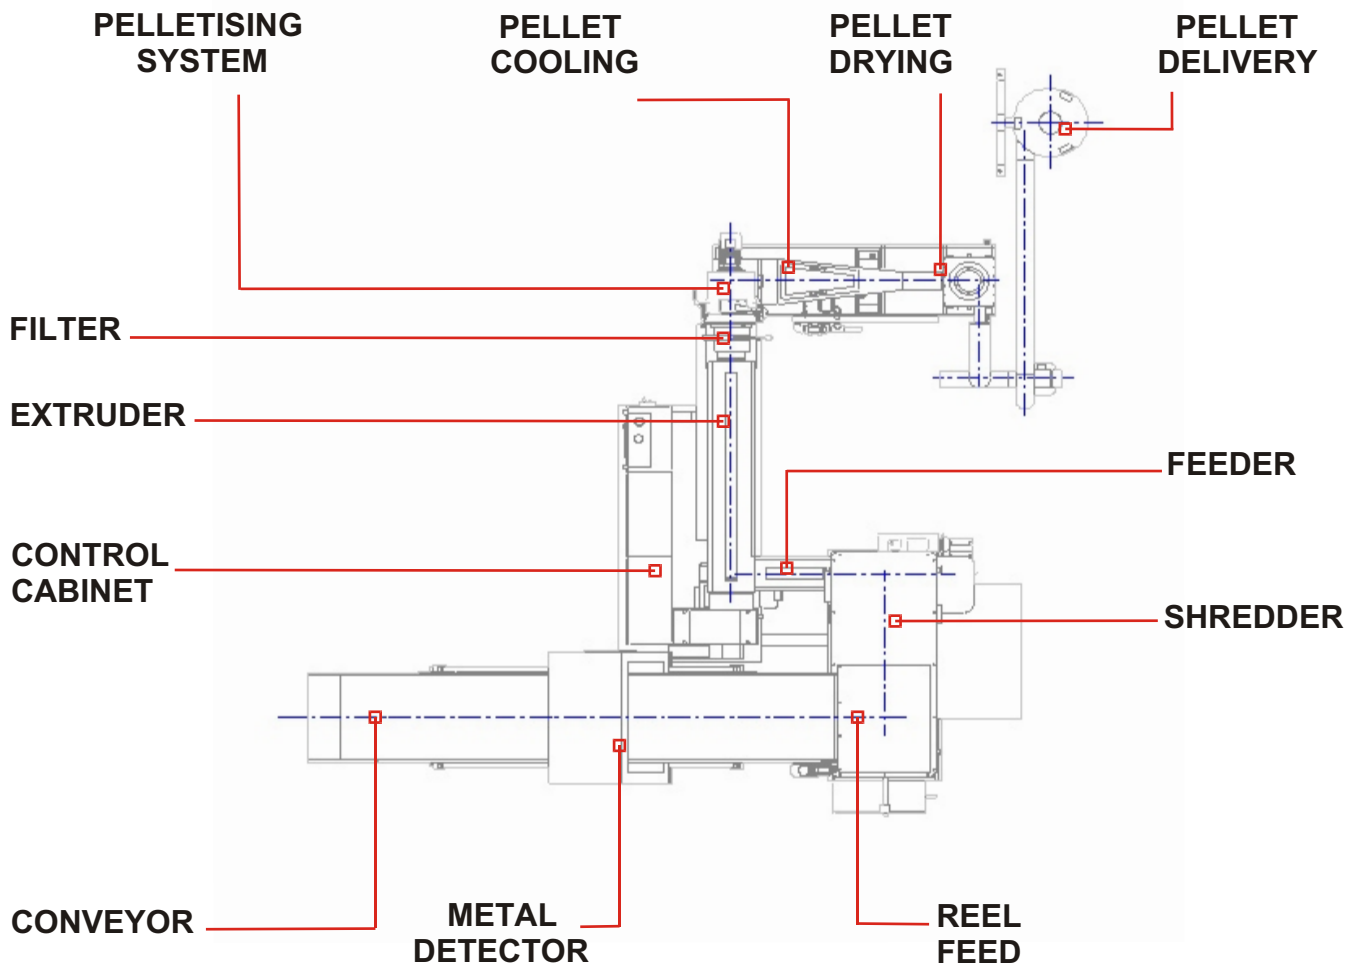

## RANGE SPECIFICATION & OUTPUT GUIDE

Model	Extruder		Output	Pellet Cooling	
			lbs/Hour	Air	Water
M100	60-25	Non-Vented	110-220	✓	✓
M100V	60-30	Vented	88-220	✓	✓
M200	65-25	Non-Vented	285-440	-	✓
M200V	65-30	Vented	275-385	-	✓
M300	90-25	Non-Vented	500-660	-	✓
M300V	90-30	Vented	460-600	-	✓
M500	100-25	Non-Vented	880-1100	-	✓
M500V	100-30	Vented	820-990	-	✓

Above outputs are to be used only as a guide. Actual outputs are dependant upon material type, form and other influencing factors

Our policy of continuing design, materials and manufacturing improvement means that some modifications to this specification may be included

57 Oak Street • Norwood • New Jersey 07648 • USA  
 Tel : (201) 767-7111 • Fax : (201) 767-6293  
 Email : sales@bostonmatthews.com • Website : www.bostonmatthews.com

