

COMPLETE SOLUTIONS FOR THE RECYCLING OF EDGE TRIM




OUTPUTS UP TO 220 LB/HR



**ON-LINE
&
OFF-LINE OPERATION**



**ENERGY
EFFICIENT
OPERATION**



**QUICK & EASY
OPERATOR
MAINTENANCE**




**AIR
COOLING**



**DESIGNED SPECIFICALLY
FOR EDGE
TRIM RECYCLING**



**SIMPLE
OPERATION**



**EASY ACCESS
FOR CLEANING**




**1st GRADE
QUALITY
PELLETS**




TYPICAL ON-LINE EDGE TRIM RECYCLING CONFIGURATIONS

VORTEX

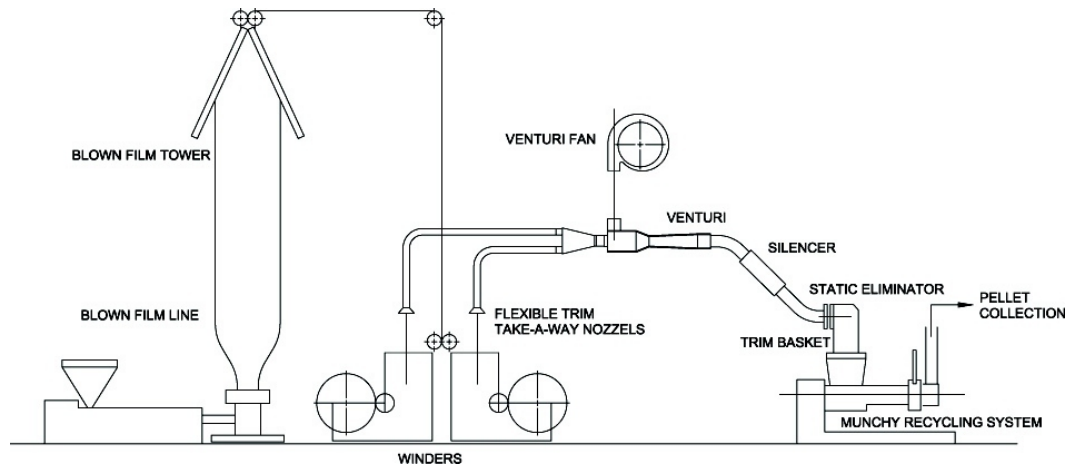

MATERIAL FEEDING SYSTEM
POWERTRIM

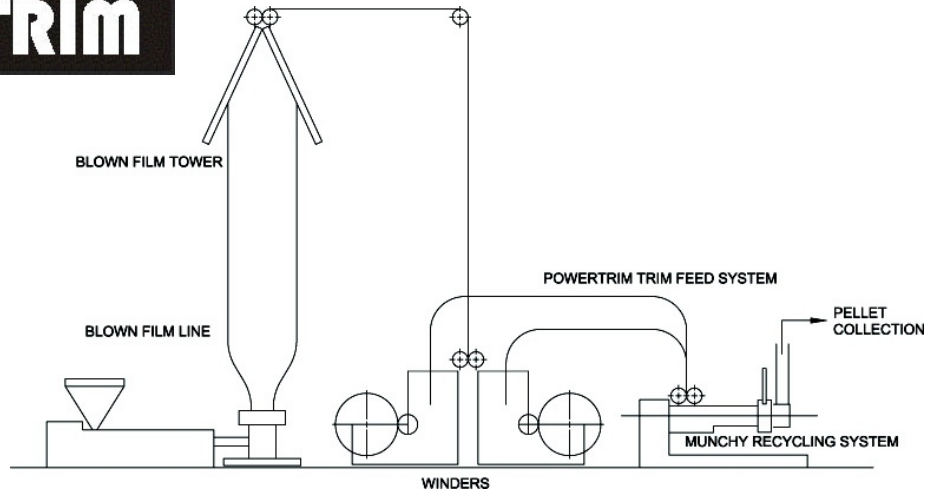

RANGE SPECIFICATION & OUTPUT GUIDE

Model	Motor kW	Output	Pellet Cooling	
		lbs/Hour	Air	Water
MINI-MUNCHY	7.5	55	✓	
MUNCHY 40	11	88	✓	✓
MUNCHY 60	15	130	✓	✓
MUNCHY 100	30	220	✓	✓

Above outputs are to be used only as a guide. Actual outputs are dependant upon material type, form and other influencing factors

Our policy of continuing design, materials and manufacturing improvement means that some modifications to this specification may be included

12136 Wiles Road • Coral Springs • Florida 33076 • USA
 Tel : 954 575 3627 • Fax : 954 575 3630
 Email : sales@bostonmatthews.com • Website : www.bostonmatthews.com

