

MUNCHER

HIGH OUTPUT SINGLE-UNIT RECYCLING SYSTEMS FROM MUNCHY



OUTPUTS FROM 220 - 1100 lb/hr



FILM



BAGS, SACKS
&
PUNCH-OUTS



PURGINGS
&
START-UP SCRAP



FABRICS
&
NON WOVENS



FIBRES, TAPES
&
ROPES



MATERIAL
HANDLING
OPTIONS



POWERFUL
INTEGRATED
SHREDDER



EASY
CLEAN
PELLETISING




QUICK & EASY
OPERATOR
MAINTENANCE



1ST GRADE
QUALITY
PELLETS



TYPICAL RECYCLING CENTRE LAYOUT

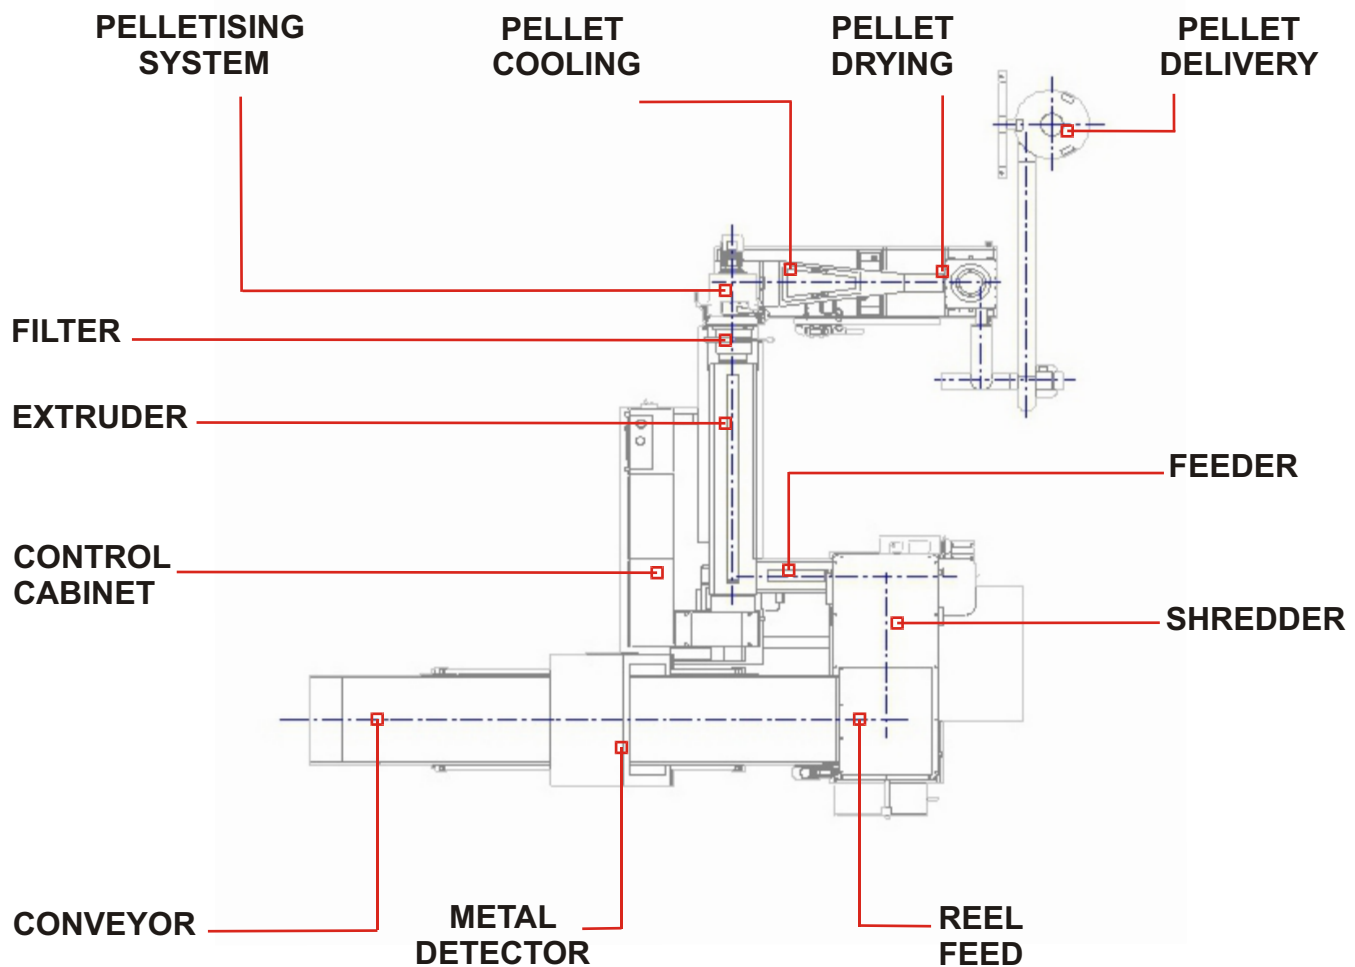

RANGE SPECIFICATION & OUTPUT GUIDE

Model	Extruder		Output	Pellet Cooling	
			lbs/Hour	Air	Water
M100	60-25	Non-Vented	110 -220	✓	✓
M100V	60-30	Vented	88-220	✓	✓
M200	65-25	Non-Vented	285-440	-	✓
M200V	65-30	Vented	275-385	-	✓
M300	90-25	Non-Vented	500-660	-	✓
M300V	90-30	Vented	460-600	-	✓
M500	100-25	Non-Vented	880-1100	-	✓
M500V	100-30	Vented	820-990	-	✓

Above outputs are to be used only as a guide. Actual outputs are dependant upon material type, form and other influencing factors

Our policy of continuing design, materials and manufacturing improvement means that some modifications to this specification may be included

12136 Wiles Road • Coral Springs • FL 33076 • USA

Tel : (954) 575 3627 • Email : sales@bostonmatthews.com

Website : www.bostonmatthews.com

